


GP Batteries

Data Sheet


Model No.: GP373

Description : Silver Oxide Low Drain Button Cell
 Nominal Voltage : 1.55 Volts
 Dimensions : Ø9.50 X 1.65mm
 Application : Analog watch
 Average Weight : 0.53g
 Storage loss at 23°C : Less than 5% in 1 year.
 Storage loss at 60°C : Less than 5% in 20 days.
 Initial Service Life : 500 hrs (30kΩ)
 (at 23°C)

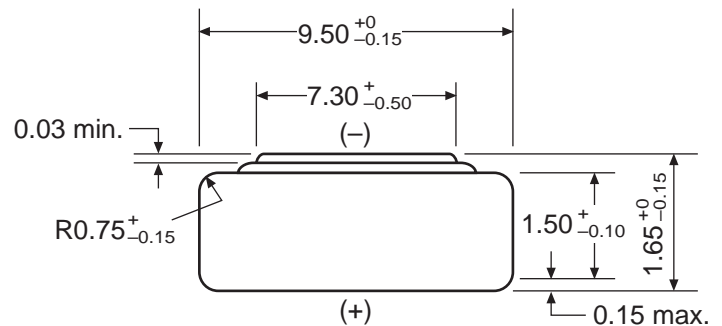

Unit : mm

Discharge Curve

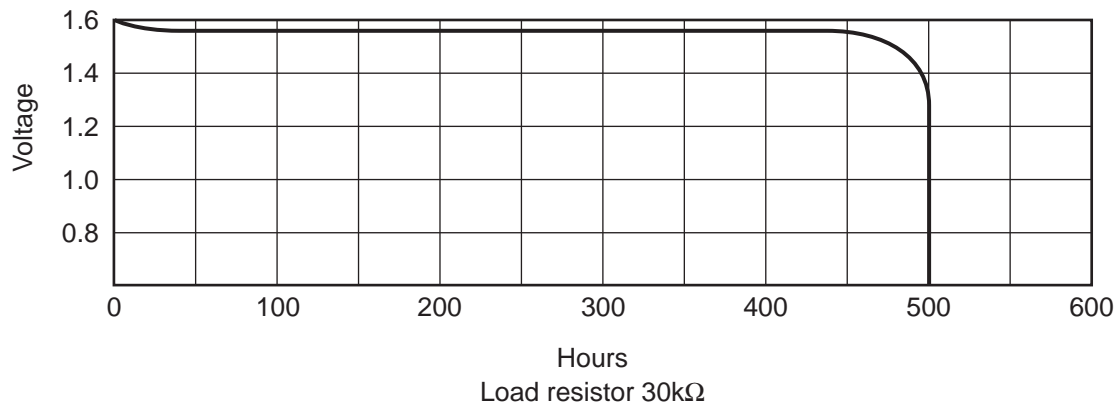

Average Service Capacity:
 26 mAh (rated capacity at 30kΩ load,
 cut off voltage 1.3V at 24°C)

Close circuit voltage:
 0.95 Volts (min.) (load resistor 100Ω at
 23°C for 2 seconds)

Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR68	SR68	373	V373	D373	SP373	SR916SW