


# GP Batteries

**Data Sheet**


**Model No.: GP379**

Description : Silver Oxide Low Drain Button Cell  
 Nominal Voltage : 1.55 Volts  
 Nominal Dimensions : Ø5.80 X 2.15mm  
 Application : Analog watch  
 Average Weight : 0.25g  
 Shelf Life : Not less than 90% of the service capacity, following 1st year storage at 20°C.  
 Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.  
 Nominal Service Life : 610 hrs (at 68kΩ Load)  
 (to 1.2V at 20°C) 185 days (at 500kΩ Load)

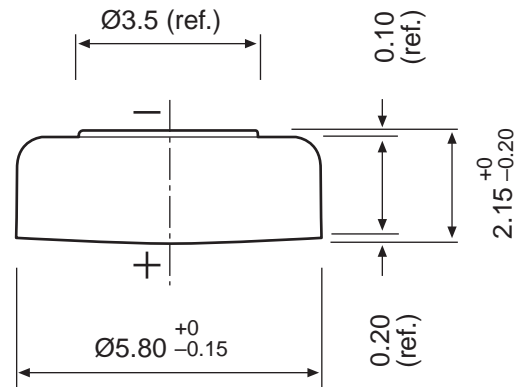

Unit : mm

## Typical Discharge Characteristics at 20°C

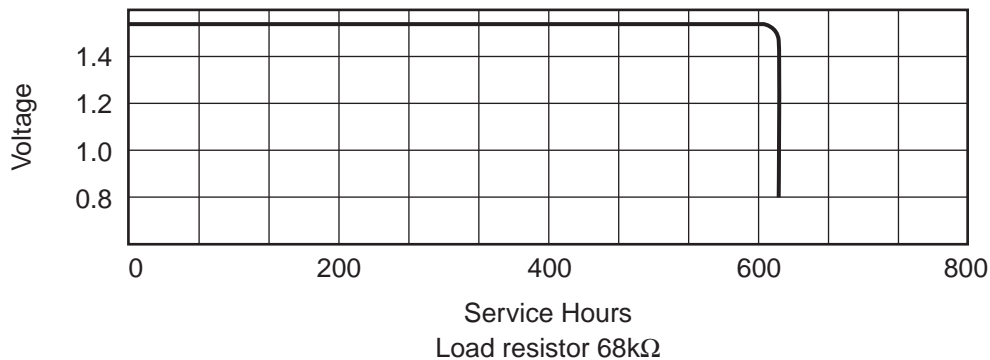

Average Service Capacity:  
 14 mAh (rated capacity at 68kΩ load,  
 cut off voltage 1.2V at 20°C)

Close circuit voltage:  
 1.20 Volts (min.) (load resistor 2kΩ at  
 20°C for 1 to 2 seconds)

## Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR63	SR63	379	V379	D379	SP379	SR521SW