


# GP Batteries

**Data Sheet**


**Model No.: GP381**

Description : Silver Oxide Low Drain Button Cell  
 Nominal Voltage : 1.55 Volts  
 Nominal Dimensions : Ø11.60 X 2.10mm  
 Applications : Analog watch, calculator etc.  
 Average Weight : 0.9g  
 Shelf Life : Not less than 90% of the service capacity, following 1st year storage at 20°C.  
 Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.  
 Nominal Service Life : 800 hrs (at 30kΩ Load)  
 (to 1.2V at 20°C) 220 days (at 200kΩ Load)

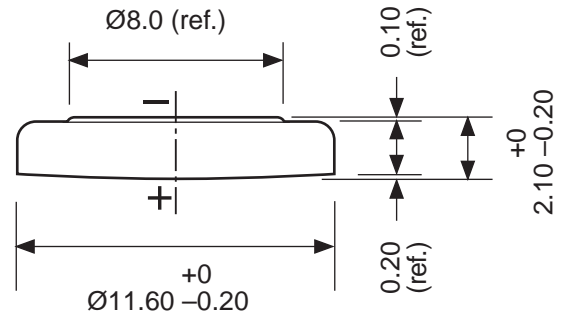

Unit : mm

## Typical Discharge Characteristics at 20°C

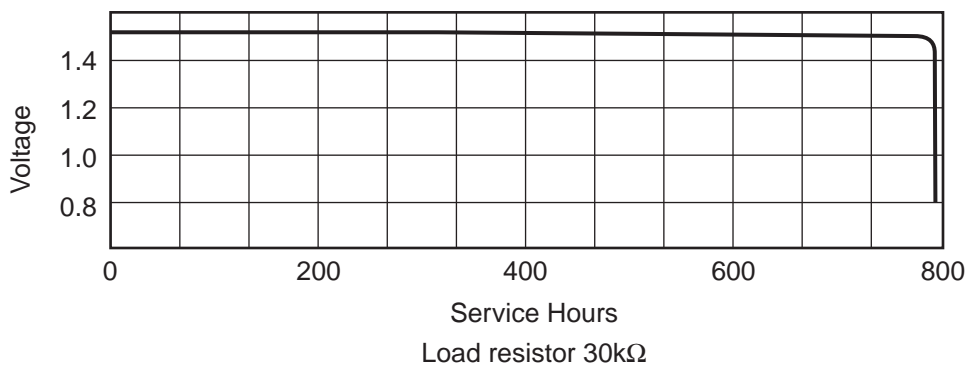

Average Service Capacity:  
 40 mAh (rated capacity at 30kΩ load,  
 cut off voltage 1.2V at 20°C)

Close circuit voltage:  
 1.30 Volts (min.) (load resistor 200Ω at  
 20°C for 1 to 2 seconds)

### Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	RENATA	SONY
SR55	SR55	381	V381	D381	381	SR1120SW