


GP Batteries


Data Sheet

Model No.: GP384

Description : Silver Oxide Low Drain Button Cell
 Nominal Voltage : 1.55 Volts
 Nominal Dimensions : Ø7.90 X 3.60mm
 Applications : Analog watch, calculator etc.
 Average Weight : 0.7g
 Shelf Life : Not less than 90% of the service capacity, following 1st year storage at 20°C.
 Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.
 Nominal Service Life : 830 hrs (at 30kΩ Load)
 (to 1.2V at 20°C) 230 days (at 200kΩ Load)

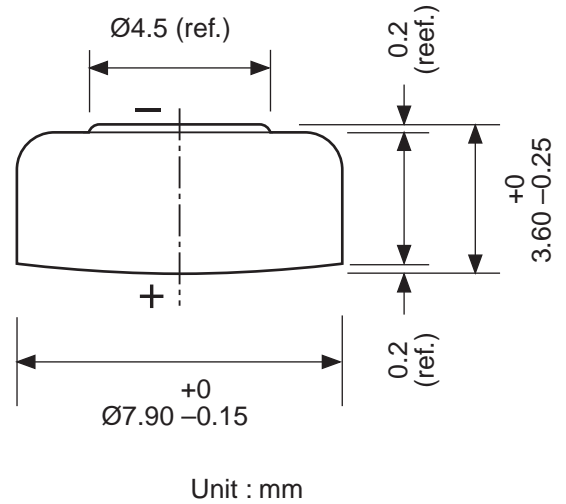

Typical Discharge Characteristics at 20°C

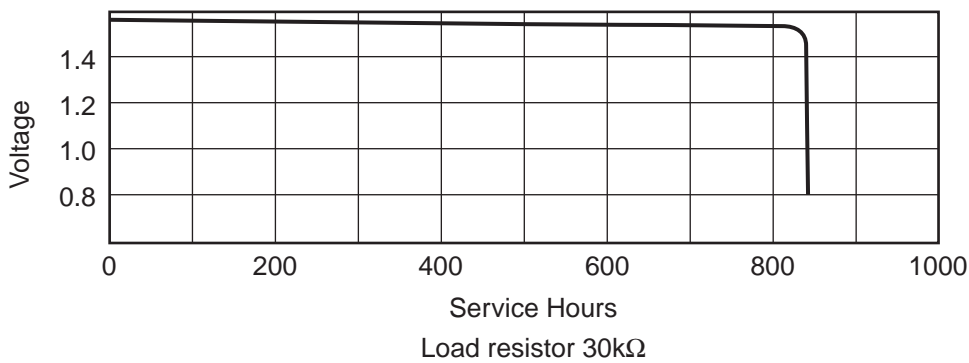

Average Service Capacity:
 42 mAh (rated capacity at 30kΩ load,
 cut off voltage 1.2V at 20°C)

Close circuit voltage:
 1.40 Volts (min.) (load resistor 2kΩ at
 20°C for 1 to 2 seconds)

Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR41	SR41	384	V384	D384	SP384	SR41SW