

HAZE

**Marine
Gel**

LEAVING THE OTHERS IN THEIR WAKE

DEEP CYCLE MARINE

Marine applications are wide and varied with many durability & power demands placed firmly on the batteries shoulders.

HAZE MARINE GEL always delivers when you need it, whatever your DC requirement in extreme situations.




Tough ABS case with DUAL MARINE TERMINALS as standard - this battery is made to start the engine and run your equipment.

GEL TECHNOLOGY delivers cranking amps, general power and long/deep discharges without the need for immediate recharge. **LONG CYCLE LIFE** and resistance to the elements.

	Dimensions mm - kg						Dimensions Inches - lbs					Cold Cranking Amps		
	Length	Width	Battery Height	Terminal Height	Terminal type	Weight	Length	Width	Battery Height	Terminal Height	Weight	20°C (68°F)	0°C (32°F)	-18°C (0°F)
HZY-MR12-80	260	168	211	231	Dual	25.1	10.24	6.61	8.31	9.09	52.7	740	600	425

	Volts	Thread size mm	Reserve Capacity - Minutes Discharged					Capacity - Ampere Hour*						
			75 Amps	25 Amps	20 Amps	15 Amps	8 Amps	100 Hr	48 Hr	20 Hr	10 Hr	5 Hr	3 Hr	1 Hr
HZY-MR12-80	12	8	33	144	195	270	560	97.0	91.1	87.9	79.0	71.0	64.1	53.0

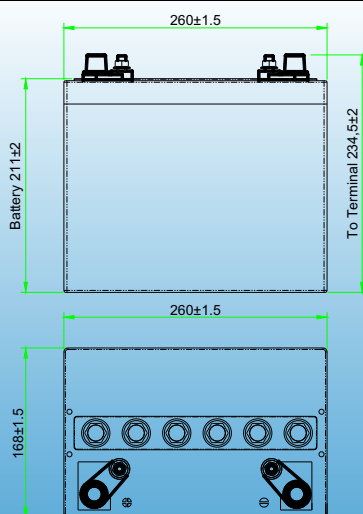

Gel Charging - To obtain maximum cycle life from your Marine Gel battery it is important that a suitable charging profile is used.

For information about the Haze range of chargers and the **Haze recommended charging profile** contact your local Haze distributor.

NOTE: All Haze Gel batteries are true Gel batteries, plate chemistry is specifically for cyclic applications, the microporous polymer gel separator and the gelling agents are European made and imported specially for Gel production.

HAZE MARINE GEL delivers maximum capacity within approximately ten cycles and keeps delivering long after the others have sunk to the murky depths. **HAZE R&D** has resulted in **SPECIAL CHEMICAL** and **PROCESS** technology to ensure consistency and performance.

260116